


meta100
BRINGS EXTRA
TO YOUR
BUILDING



TK ELEVATOR
MOVES PEOPLE -
THE FUTURE OF
URBAN MOBILITY





meta100 brings extra to your building

meta100 is a value-for-money solution targeting mid-rise buildings in the residential segment, combining reduced construction costs and fast installation. With its reliable engineering and stylish car designs, meta100 provides peace of mind and brightens up spaces. As a result, meta100 brings extra to your building.



Makes business sense

Reduced construction time means reduced construction costs. The smart, value-for-money choice.



Gives peace of mind

TK Elevator engineering standards mean trusted reliability.



Brightens up your building

Stylish car interiors designed to make your building stand out.

DESIGNED FOR

- Public and private residential mid-rise buildings

SPECIFICATIONS

- Max. travel height: $\leq 110\text{m}$
- Max. number of floors: ≤ 32
- Rated load: 1,150kg
- Rated speed: $\leq 2.0\text{m/s}$

Makes business sense

meta100 is our practical, value-for-money mid-rise elevator designed to reduce construction costs and increase revenue.



Finish your project in no time

Pre-assembled components plus a scaffold-free set up make installation safer and quicker.

Reduce construction cost


Our bottom suspension system reduces shaft overhead size and overall building height.

Maximise your revenue

Compact shaft dimensions give increased rentable floor space. A faster completion time hastens occupation and revenue from tenants.


Gives peace of mind

Trusted TK Elevator engineering and stringent German design criteria deliver excellent reliability.

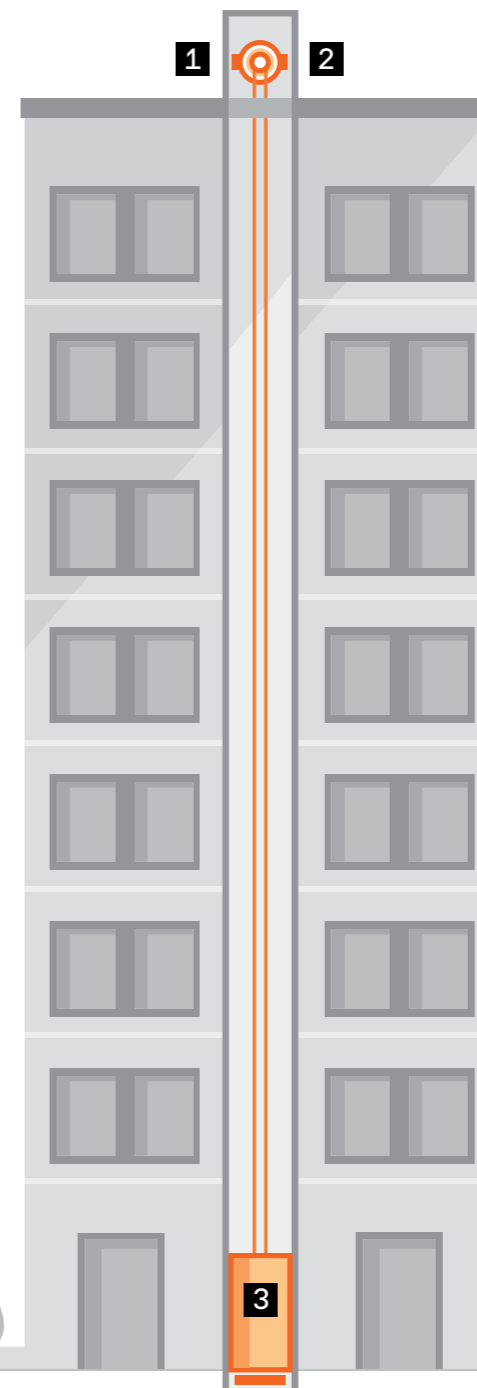


1 Trusted brake technology

2 safety switches automatically stop and report when brake and brake air gap exceed specified values. Reduces the need for unscheduled servicing.



2 Longevity of elements

Self lubricating, covered brake system for longer service life.



3 Optimal energy consumption

Standby mode reduces power consumption and improves energy efficiency.



Brightens up your building

High quality engineering ensures a smooth in-car experience, made even brighter by a wide choice of car interiors.



Fixtures

User friendly controls and panels make every passenger journey a delight.

Accessories

Combine useful amenities such as mirrors, handrails, ceiling and lighting effects to complete the experience.




Trends

Each of our cabins is crafted by our design team to enhance your building with complementary colors and finishes.



STYLISH

Stylish interior design with a touch of luxury.

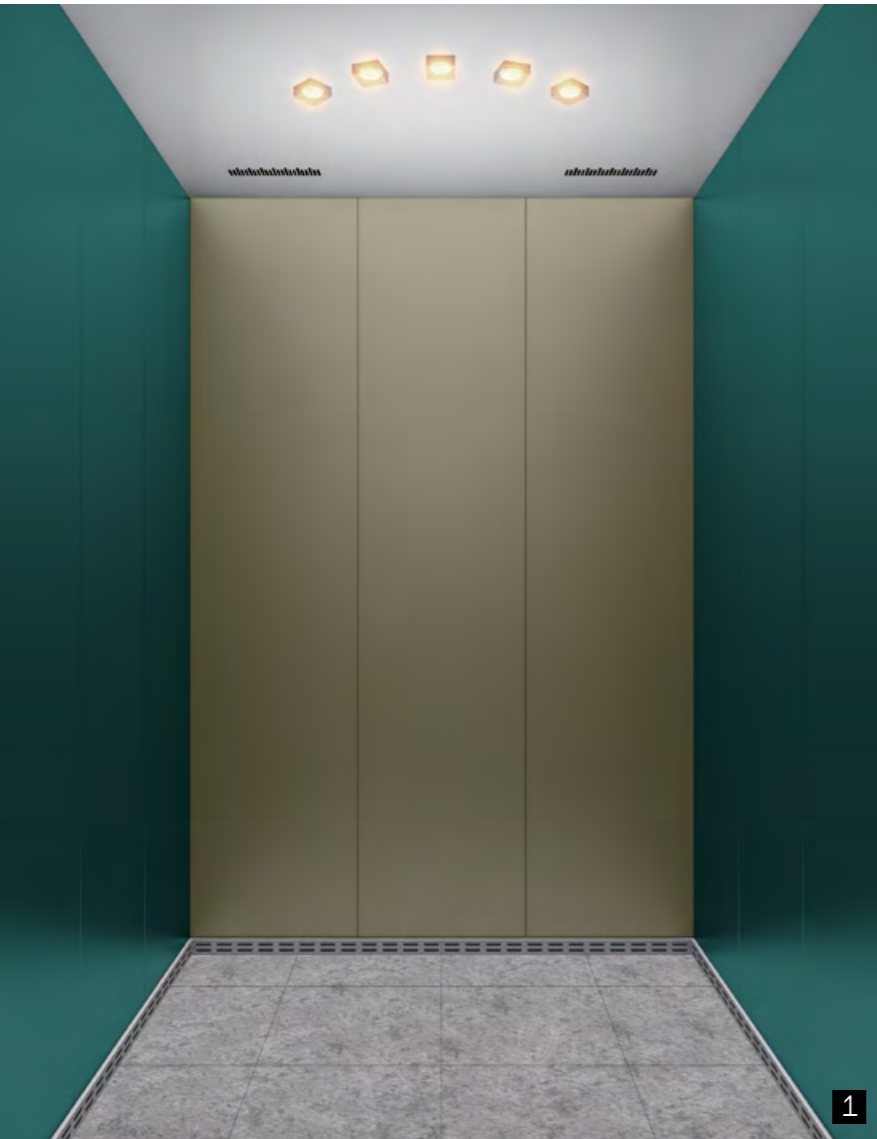

1 OCEAN

- Ceiling RAL 7035
- Side Wall RAL 5020
- Rear Wall RAL 1035 Metallic
- Front Wall RAL 1035 Metallic
- Door RAL 1035 Metallic
- Floor CFL010

2 COPPER


- Ceiling RAL 1015
- Side Wall RAL 8029 Metallic
- Rear Wall RAL 1015
- Front Wall RAL 1015
- Door RAL 1015
- Floor H260



COP Black

HERITAGE REFINED

Revival of colors, crafts and materials from the past with today's conveniences.

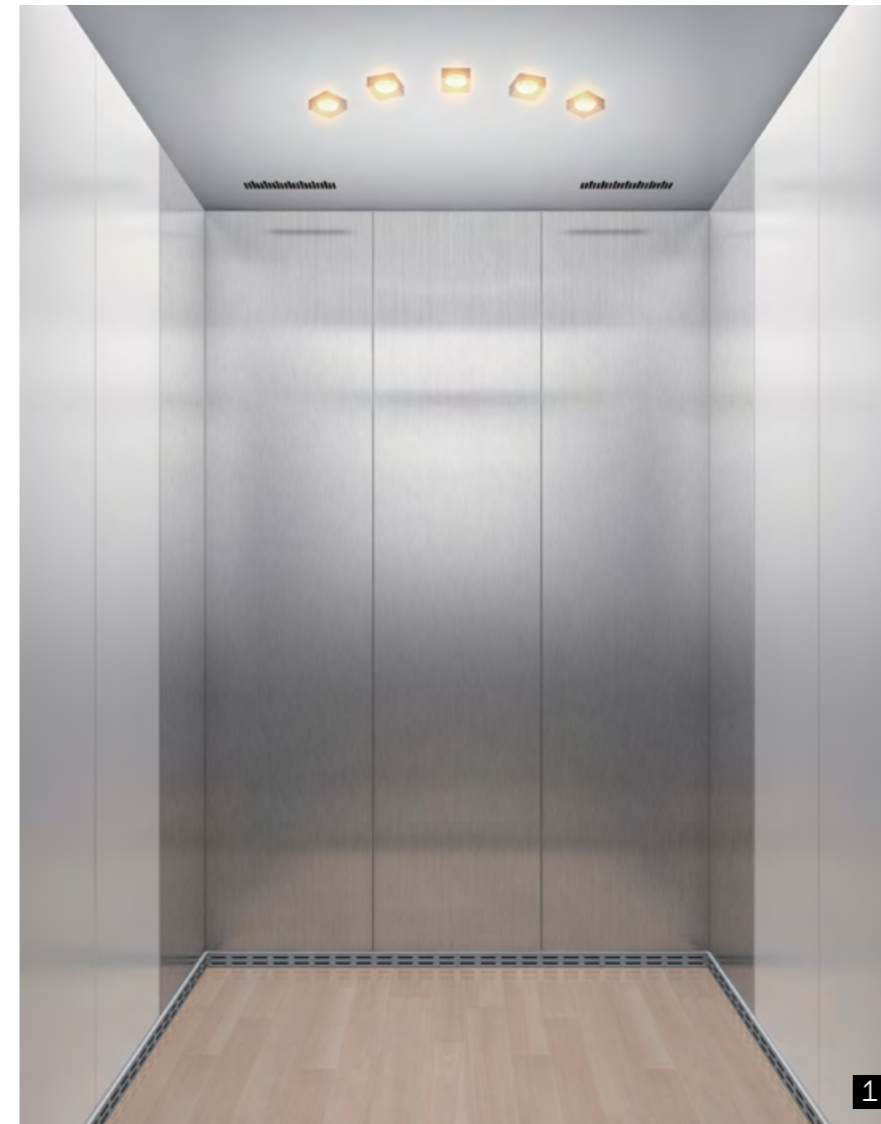

1 LIGHT WOOD

- Ceiling RAL 7035
- Side Wall RAL 9003 + Hairline stainless steel
- Rear Wall Hairline stainless steel
- Front Wall Hairline stainless steel
- Door Hairline stainless steel
- Floor TFW13

2 DARK WOOD

- Ceiling RAL 7035
- Side Wall RAL 1015 + Hairline stainless steel
- Rear Wall Hairline stainless steel
- Front Wall Hairline stainless steel
- Door Hairline stainless steel
- Floor TFW03



COP White

CONTEMPORARY

Minimalistic interior design, influenced by local taste.



1 SKY

- Ceiling RAL 7035
- Side Wall RAL 5024
- Floor H260
- Rear Wall Hairline stainless steel
- Front Wall Hairline stainless steel
- Door Hairline stainless steel

2 MIRROR


- Ceiling RAL 7035
- Side Wall Hairline stainless steel
- Floor H260
- Rear Wall Hairline + mirror stainless steel
- Front Wall Hairline stainless steel
- Door Hairline stainless steel



COP Black

NATURAL HOME

A cosy, warm and comfortable interior setting, created using natural textures.

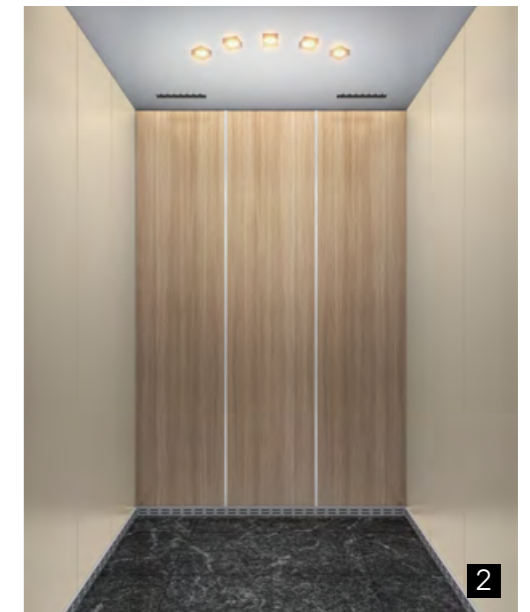

1 SKY

- Ceiling RAL 7035
- Side Wall Mirabell green
- Floor CFL010
- Rear Wall Hairline stainless steel
- Front Wall Hairline stainless steel
- Door Hairline stainless steel

2 MIRROR



- Ceiling RAL 7035
- Side Wall RAL 1013
- Floor H260
- Rear Wall Laminate (844NT Aged ash-s)
- Front Wall Hairline stainless steel
- Door Hairline stainless steel









COP White

MODERN FRESHNESS





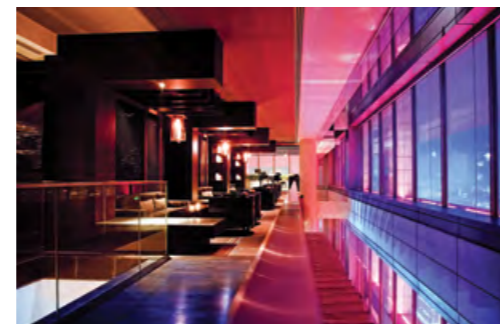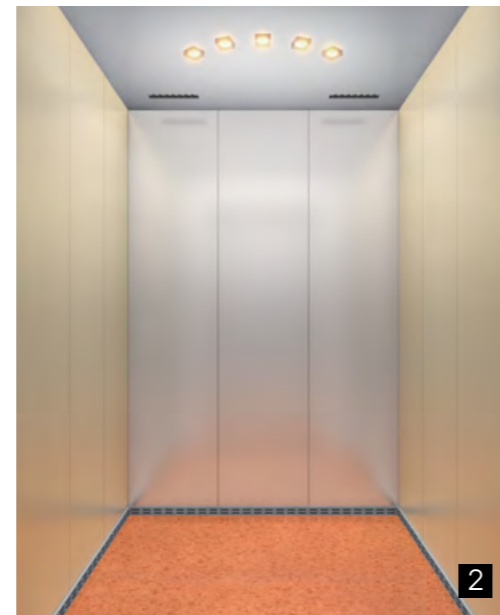
A mix of vibrant colors with traditional patterns for that modern twist.



1 LIME

 Ceiling RAL 7035	 Rear Wall RAL 9003	 Front Wall RAL 9003	 Door Hairline stainless steel
 Side Wall RAL 9003			
 Floor TF8007			

2 TANGERINE

 Ceiling RAL 7035	 Rear Wall RAL 9003	 Front Wall RAL 9003	 Door Hairline stainless steel
 Side Wall RAL 1015			
 Floor TF8009			



COP
White

ACCESSORIES

Simple, functional and robust. Our classic combination of materials with universal style.



Ceiling



Curved



Round




Cubes

Handrail




Half-size mirror

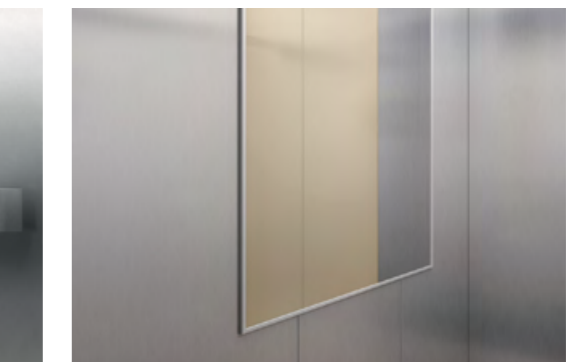

FIXTURES

User-friendly design for ease of use.

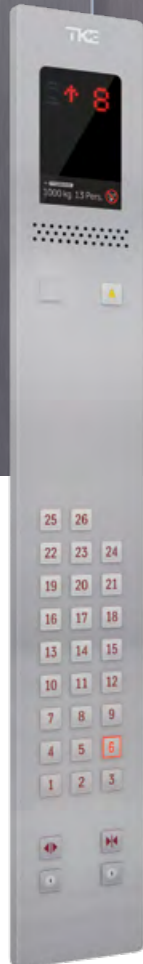

CLASSIC

Panel	Stainless steel
Indicator	Red dot matrix
Button	Square button with red light



BLACK

Panel	Stainless steel
Indicator	Red dot matrix
Button	Square button with red light



WHITE

Panel	Stainless steel
Indicator	Blue white segment LCD
Button	Round button with blue light



All images shown here are for reference only.

YOUR INNOVATION PARTNER

elevators and escalators in service

countries serviced

1,200,000 100+

employees

50,000+

service available for customers

locations

24/7 1,000+

service technicians

24,000+



WWW.TKELEVATOR.COM

FUNCTION LIST

CATEGORY	NO.	FUNCTION	MR	MRL
Enhanced Car Functions	1	Door reopen by following landing call at same landing	S	S
	2	Collective selective control	S	S
	3	Full-load non-stop	S	S
	4	Onward travel to the next stop in the case of a non-opening door	S	S
	5	Anti-nuisance "limit number of car call when empty load"	S	S
	6	Anti-nuisance "car call cancellation at terminal landing"	S	S
	7	Anti-nuisance "car call deletion opposite to travel direction"	S	S
	8	Adjustable waiting time for opening door at the main landing	S	S
	9	Adjustable speed and torque of door operator	S	S
	10	Re-leveling	S	S
	11	Energy saving operation for car light and fan	S	S
	12	Elevator start-up loading weighting compensation function	S	S
	13	In advance door open	O	O
	14	Changing fire landing	O	O
	15	Changing parking landing	O	O
	16	Changing main landing	O	O
	17	Main landing return	O	O
Safety and Emergency Functions	18	Landing to the nearest floor in case of problem (e.g. overheat of motor, car position missing)	S	S
	19	Fire emergency return (FER)	S	S
	20	Alarm button & intercom button	S	S
	21	Emergency car lighting	S	S
	22	Overload protect	S	S
	23	Repeat door closing in the event of lock failure	S	S
	24	Door overload protect	S	S
	25	Safety curtain for door	S	S
	26	Parking (by key switch)	S	S
	27	Phase failure and phase reversal protection	S	S
	28	Lockable main switch integrated for controller cabinet	S	S
	29	Emergency electrical operation	S	S
	30	Inspection operation	S	S
	31	Traction machine overheat supervision	S	S
	32	Traction machine skidding protection	S	S
	33	Prepared fire emergency return signal	S	S
	34	Unintended car movement protection	S	S
	35	Restrict the opening of the car door inside the car	S	S
	36	Brake torque detection functon	S	S
	37	Door lock safety device failure detection	S	S
	38	Emergency operation for electrical brake release	NA	S
	39	Main COP attendance	O	O


FUNCTION LIST

CATEGORY	NO.	FUNCTION	MR	MRL
Safety and Emergency Functions	40	Fireman service	O	O
	41	Door lock bypass function	S	S
	42	Automatic rescue operation	O	O
	43	Earthquake function (sensors by customer)	O	O
	44	Earthquake function (including sensors)	O	O
	45	Emergency power operation (generator by customer)	O	O
	46	Top of car emergency exit	O	O
Trip Functions	47	Residual current devices function (RCD function)	O	O
	48	Automatic doors	S	S
	49	Collective fault signal	S	S
	50	Operation counter (trip and hour)	S	S
Human Machine Interface	51	Car priority	O	O
	52	Door close button	S	S
	53	Door open button	S	S
	54	Car call cancellation (by double press)	S	S
	55	Landing indicator of dot-matrix (red)	S	S
	56	Car indicator of dot-matrix (red)	S	S
	57	Landing indicator of 4.3" blue-white segment LCD	O	O
	58	Car indicator of 5.7" blue-white segment LCD	O	O
	59	Car arrival chime	O	O
	60	Speech synthesis service	O	O
	61	Second COP (exclude car attendant and intercom)	O	O
	62	COP for disabled persons (no indicator, braille push buttons as standard)	O	O
	63	Intercom system	S	S
	64	Traveling cable (include video transmission function)	O	O
	65	BAS interface function (dry contactor signal)	O	O
	66	Color video camera (in car)	O	O
	Monitoring and Tele-Service	67	Remote monitor interfacing (exclude MH2 board)	O
68		Remote monitor interfacing (include MH2 board, without modem)	O	O
69		Supervision panel (cable by other, cable length≤150m)	O	O
70		Build automation interfacing (RS232,MM board)	O	O
Group/Duplex Control	71	Build automation interfacing (RS485,MMC board)	O	O
	72	Group control (max. 8 units)	O	O
	73	Continued group/duplex operation in case of failure of the other elevator	O	O
	74	Taking units out of group (timer/switch)	O	O


* S - Standard; O - Option; NA - Not applicable

LAYOUT (MACHINEROOM)

Shaft vertical section

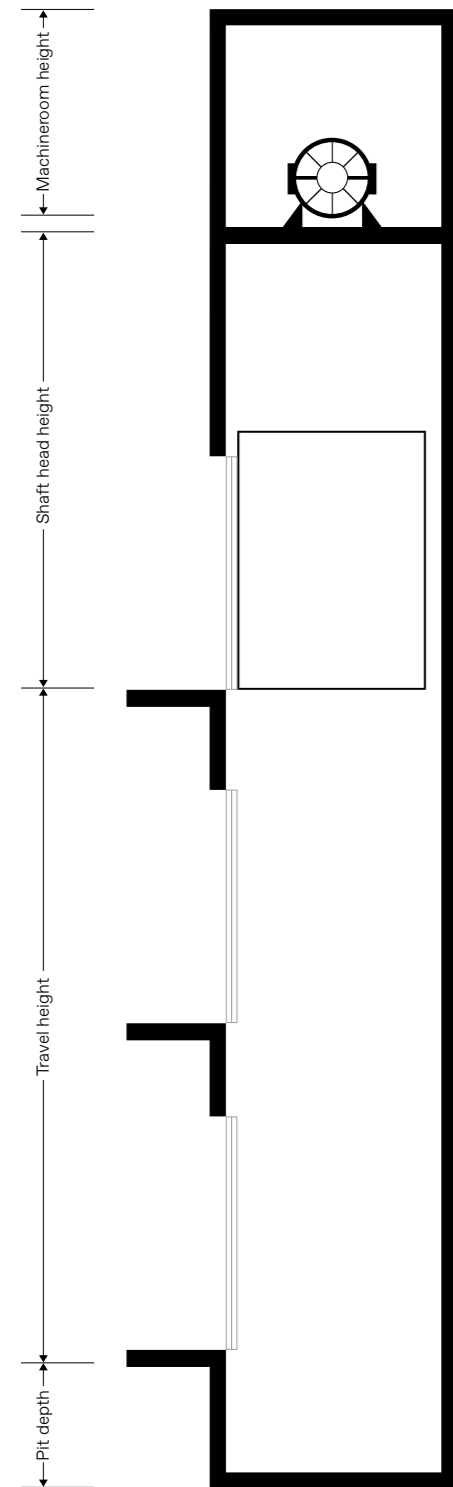

Lift plan

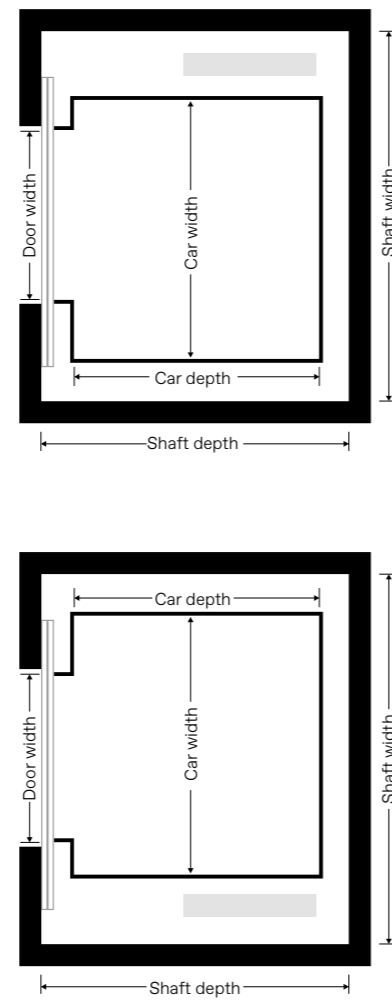

TECHNICAL SPECIFICATIONS (MACHINEROOM)

Basic parameters

RATED LOAD (KG)	RATED SPEED (M/S)	MAX. TRAVEL HEIGHT (M)	MAX. NUMBER OF FLOORS	MIN. OVERHEAD HEIGHT (MM)	MIN. PIT DEPTH (MM)
630	1.0	50	18	CH+1350	1210
	1.6	75	26	CH+1500	1400
	1.75	90	31	CH+1550	1450
800	1.0	50	18	CH+1350	1210
	1.6	75	26	CH+1500	1400
	1.75	90	31	CH+1550	1450
	2	110	32	CH+1650	1550
1000	2.5	125	38	CH+1900	1850
	1	50	18	CH+1350	1210
	1.6	75	26	CH+1500	1400
1150	1.75	90	31	CH+1550	1450
	2	110	32	CH+1650	1550
	2.5	125	38	CH+1900	1850

* CH is car height. Standard car height is 2400mm and 2200/2300mm are optional.


Car/Shaft dimensions

RATED LOAD (KG)	CAR SIZE (CW × CD)(MM)	DOOR OPENING	DOOR SIZE (DW × DH)(MM)	MIN. SHAFT SIZE (SW × SD)(MM)
630	1100 × 1400	Centre Opening	800 × 2100	1750 × 1800 (≤1.75m/s)
	1350 × 1400	Centre Opening	800 × 2100	1950 × 1800 (≤2.0m/s)
				2000 × 1800 (2.5m/s)
800	1100 × 1700	Centre Opening	800 × 2100	1750 × 2100 (≤2.5m/s)
			900 × 2100	1950 × 2100 (≤2.5m/s)
	1600 × 1400	Centre Opening	900 × 2100	2200 × 1800 (≤2.0m/s)
				2250 × 1800 (2.5m/s)
1000	1600 × 1500	Centre Opening	900 × 2100	2200 × 1900 (≤2.0m/s)
				2250 × 1900 (2.5m/s)
	1400 × 1600	Centre Opening	900 × 2100	2050 × 2000 (≤2.5m/s)
	1100 × 2100	Centre Opening	900 × 2100	1950 × 2500 (≤2.5m/s)
1150	1800 × 1400	Centre Opening	1100 × 2100	2400 × 1800 (≤2.0m/s)
	1800 × 1500	Centre Opening	1000 × 2100	2410 × 1890 (≤2.0m/s)
	1200 × 2100	Centre Opening	900 × 2100	1950 × 2500 (≤2.0m/s)


* For specification over the above scope, please contact the local thyssenkrupp elevator representative.

LAYOUT (MACHINEROOM-LESS)

Shaft vertical section

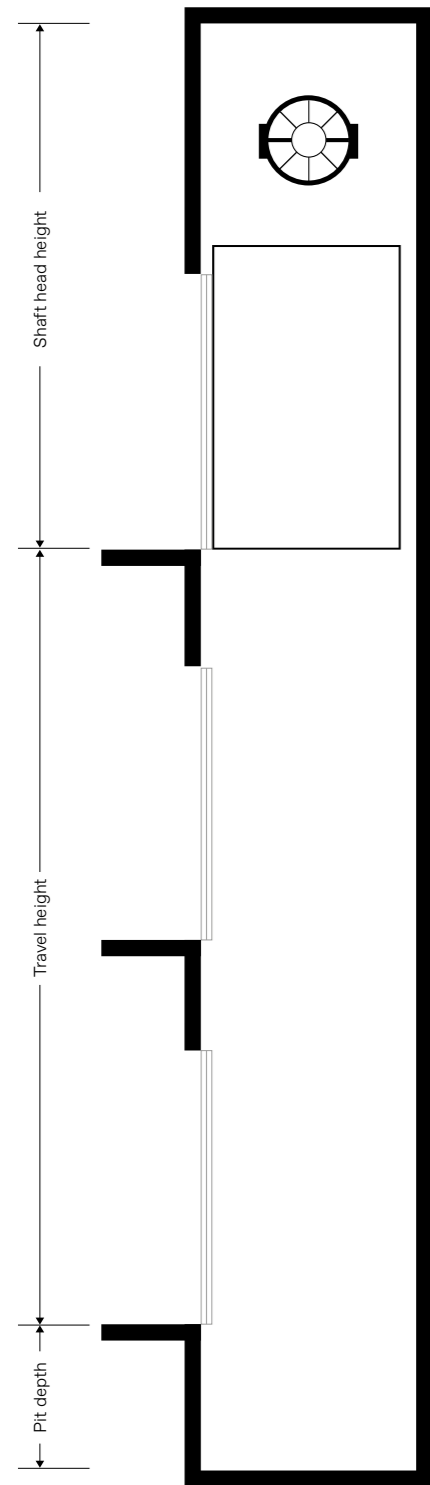

Lift plan

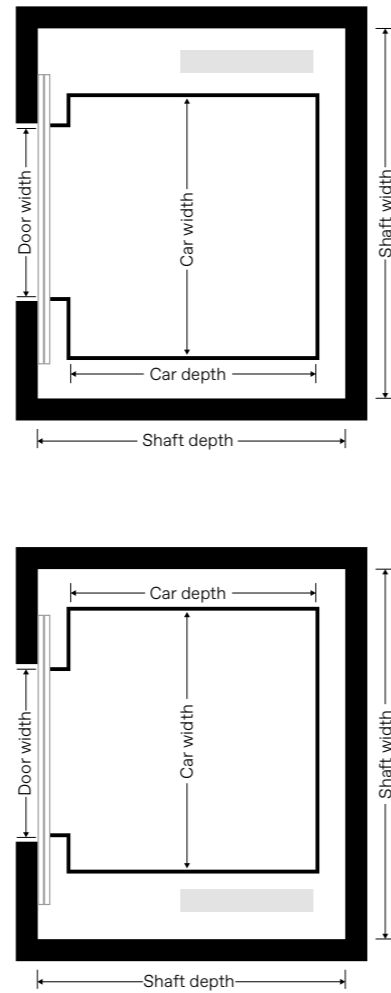

TECHNICAL SPECIFICATIONS (MACHINEROOM-LESS)

Basic parameters

RATED LOAD (KG)	RATED SPEED (M/S)	MAX. TRAVEL HEIGHT (M)	MAX. NUMBER OF FLOORS
630	1.0	50	18
	1.6	75	26
	1.75	90	31
800	1.0	50	18
	1.6	75	26
	1.75	90	31
1000	2	110	32
	1	50	18
	1.6	75	26
1150	1.75	90	31
	2	110	32
	1	50	18

Minimum shaft head height and shaft pit depth

CAR HEIGHT (MM)	RATED SPEED (M/S)	MIN. OVERHEAD HEIGHT (MM)	MIN. PIT DEPTH (MM)
2400	1	3750	1210
	1.6	3950	1400
	1.75	4000	1450
2200/2300	2	4100	1550
	1	3600/3650	1210
	1.6	3800/3850	1400
	1.75	3850/3900	1450
	2	4050/4050	1550

* Standard car height is 2400mm and 2200/2300mm are optional.

Car/Shaft dimensions

RATED LOAD (KG)	CAR SIZE (CW × CD)(MM)	DOOR OPENING	DOOR SIZE (DW × DH)(MM)	MIN. SHAFT SIZE (SW × SD)(MM)
630	1100 × 1400	Centre Opening	800 × 2100	1750 × 1800
800	1350 × 1400	Centre Opening	800 × 2100	1950 × 1800
	1100 × 1700		900 × 2100	1750 × 2100
1000	1600 × 1400	Centre Opening	900 × 2100	2200 × 1800
	1600 × 1500			2200 × 1900
	1100 × 2100			1950 × 2500
1150	1800 × 1400	Centre Opening	1100 × 2100	2400 × 1800
	1200 × 2100		1000 × 2100	2200 × 2500

* For specification over the above scope, please contact the local thyssenkrupp Elevator representative.

FUNCTION LIST


CATEGORY	NO.	FUNCTION	MR	MRL
Enhanced Car Functions	1	Door reopen by following landing call at same landing	S	S
	2	Collective selective control	S	S
	3	Full-load non-stop	S	S
	4	Onward travel to the next stop in the case of a non-opening door	S	S
	5	Anti-nuisance "limit number of car call when empty load"	S	S
	6	Anti-nuisance "car call cancellation at terminal landing"	S	S
	7	Anti-nuisance "car call deletion opposite to travel direction"	S	S
	8	Adjustable waiting time for opening door at the main landing	S	S
	9	Adjustable speed and torque of door operator	S	S
	10	Re-leveling	S	S
	11	Energy saving operation for car light and fan	S	S
	12	Elevator start-up loading weighting compensation function	S	S
	13	In advance door open	O	O
	14	Changing fire landing	O	O
	15	Changing parking landing	O	O
	16	Changing main landing	O	O
	17	Main landing return	O	O
	Safety and Emergency Functions	18	Door nudging	S
19		Landing to the nearest floor in case of problem (e.g. overheat of motor, car position missing)	S	S
20		Fire emergency return (FER)	S	S
21		Alarm button & intercom button	S	S
22		Emergency car lighting	S	S
23		Overload protect	S	S
24		Repeat door closing in the event of lock failure	S	S
25		Door overload protect	S	S
26		Safety curtain for door	S	S
27		Parking (by key switch)	S	S
28		Phase failure and phase reversal protection	S	S
29		Lockable main switch integrated for controller cabinet	S	S
30		Emergency electrical operation	S	S
31		Inspection operation	S	S
32		Traction machine overheat supervision	S	S
33		Traction machine skidding protection	S	S
34		Prepared fire emergency return signal	S	S
35		Unintended car movement protection	S	S
36		Restrict the opening of the car door inside the car	S	S
37		Brake torque detection function	S	S
38		Door lock safety device failure detection	S	S
39		Emergency operation for electrical brake release	NA	S

FUNCTION LIST


CATEGORY	NO.	FUNCTION	MR	MRL
Safety and Emergency Functions	40	Main COP attendance	O	O
	41	Fireman service	O	O
	42	Door lock bypass function	S	S
	43	Automatic rescue operation	O	O
	44	Earthquake function (sensors by customer)	O	O
	45	Earthquake function (including sensors)	O	O
	46	Emergency power operation (generator by customer)	O	O
	47	Top of car emergency exit	O	S
	48	Residual current devices function (RCD function)	S	S
	Trip Functions	49	Automatic doors	S
50		Collective fault signal	S	S
51		Operation counter (trip and hour)	S	S
52		Car priority	O	O
53		Door close button	S	S
Human Machine Interface	54	Door open button	S	S
	55	Car call cancellation (by double press)	S	S
	56	Landing indicator of dot-matrix (red)	S	S
	57	Car indicator of dot-matrix (red)	S	S
	58	Landing indicator of 4.3" blue-white segment LCD	O	O
	59	Car indicator of 5.7" blue-white segment LCD	O	O
	60	Car arrival chime	O	O
	61	Speech synthesis service	O	O
	62	Second COP (exclude car attendant and intercom)	O	O
	63	COP for disabled persons (no indicator, braille push buttons as standard)	O	O
Monitoring and Tele-Service	64	Intercom system	S	S
	65	Traveling cable (include video transmission function)	O	O
	66	BAS interface function (dry contactor signal)	O	O
	67	Color video camera (in car)	O	O
	68	Remote monitor interfacing (exclude MH2 board)	O	O
	69	Remote monitor interfacing (include MH2 board, without modem)	O	O
	70	Supervision panel (cable by other, cable length≤150m)	O	O
	71	Build automation interfacing (RS232,MM board)	O	O
	72	Build automation interfacing (RS485,MMC board)	O	O
	73	Group control (max. 8 units)	O	O
Group/Duplex Control	74	Continued group/duplex operation in case of failure of the other elevator	O	O
	75	Peak service function (only for group control)	O	NA
	76	Taking units out of group (timer/switch)	O	O

* S - Standard; O - Option; NA - Not applicable

Shaft vertical section

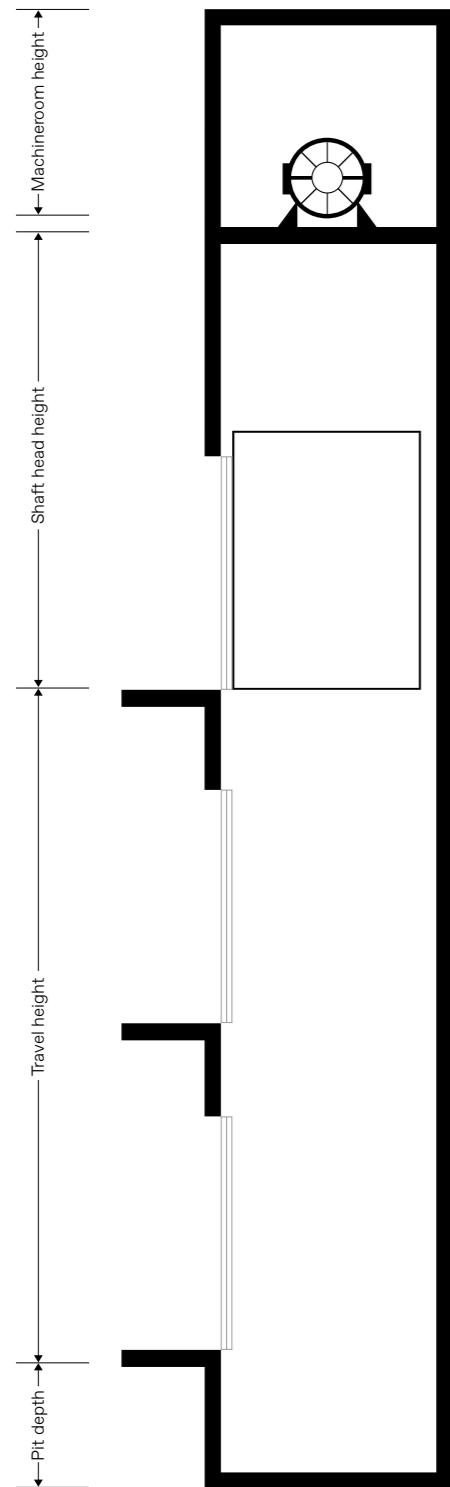

Lift plan

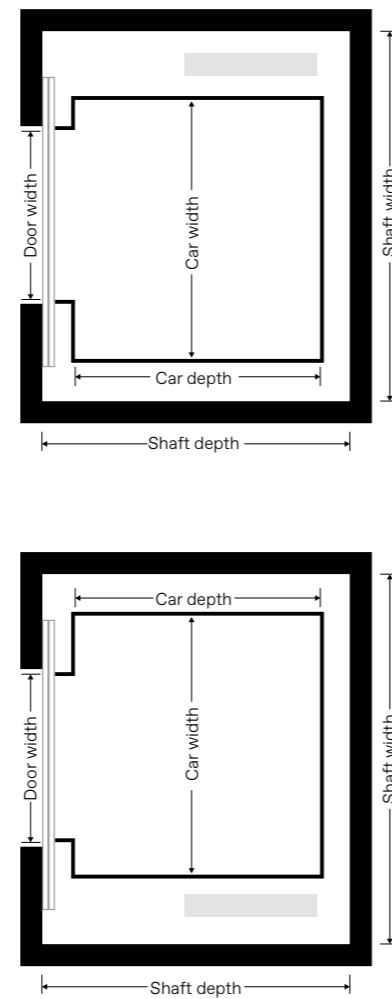

Basic parameters

RATED LOAD (KG)	RATED SPEED (M/S)	MAX. TRAVEL HEIGHT (M)	MAX. NUMBER OF FLOORS	MIN. OVERHEAD HEIGHT (MM)	MIN. PIT DEPTH (MM)
630	1.0	50	18	CH+1350	1800
	1.6	75	26	CH+1500	1900
	1.75	90	31	CH+1550	1950
800	1.0	50	18	CH+1350	1800
	1.6	75	26	CH+1500	1900
	1.75	90	31	CH+1550	1950
	2	110	32	CH+1650	2050
1000	2.5	125	38	CH+1900	2200
	1	50	18	CH+1350	1300
	1.6	75	26	CH+1500	1400
1150	1.75	90	31	CH+1550	1450
	2	110	32	CH+1650	1550
	2.5	125	38	CH+1900	1850
1500	1	50	18	CH+1350	1300
	1.6	75	26	CH+1500	1400
	1.75	90	31	CH+1550	1450
	2	110	32	CH+1650	1550

* CH is car height. Standard car height is 2400mm and 2200/2300mm are optional.


Car/Shaft dimensions

RATED LOAD (KG)	CAR SIZE (CW × CD)(MM)	DOOR OPENING	DOOR SIZE (DW × DH)(MM)	MIN. SHAFT SIZE (SW × SD)(MM)
630	1100 × 1400	Centre Opening	800 × 2100	1750 × 1800 (≤1.75m/s)
	1350 × 1400	Centre Opening	800 × 2100	1950 × 1800 (≤2.0m/s)
				2000 × 1800 (2.5m/s)
800	1100 × 1700	Centre Opening	800 × 2100	1750 × 2100 (≤2.5m/s)
			900 × 2100	1950 × 2100 (≤2.5m/s)
	1600 × 1400	Centre Opening	900 × 2100	2200 × 1800 (≤2.0m/s)
				2250 × 1800 (2.5m/s)
1000	1600 × 1500	Centre Opening	900 × 2100	2200 × 1900 (≤2.0m/s)
				2250 × 1900 (2.5m/s)
	1400 × 1600	Centre Opening	900 × 2100	2050 × 2000 (≤2.5m/s)
	1100 × 2100	Centre Opening	900 × 2100	1950 × 2500 (≤2.5m/s)
1150	1800 × 1400	Centre Opening	1100 × 2100	2400 × 1800 (≤2.0m/s)
	1800 × 1500	Centre Opening	1000 × 2100	2410 × 1890 (≤2.0m/s)
	1200 × 2100	Centre Opening	900 × 2100	1950 × 2500 (≤2.0m/s)


* For specification over the above scope, please contact the local thyssenkrupp elevator representative.

LAYOUT (MACHINEROOM-LESS)

Shaft vertical section

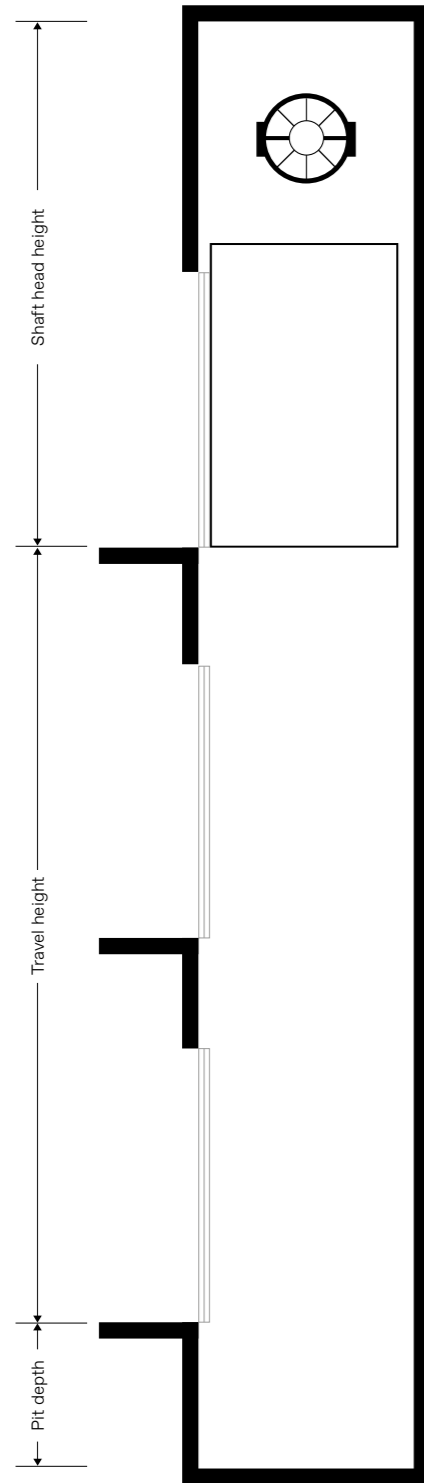

Lift plan

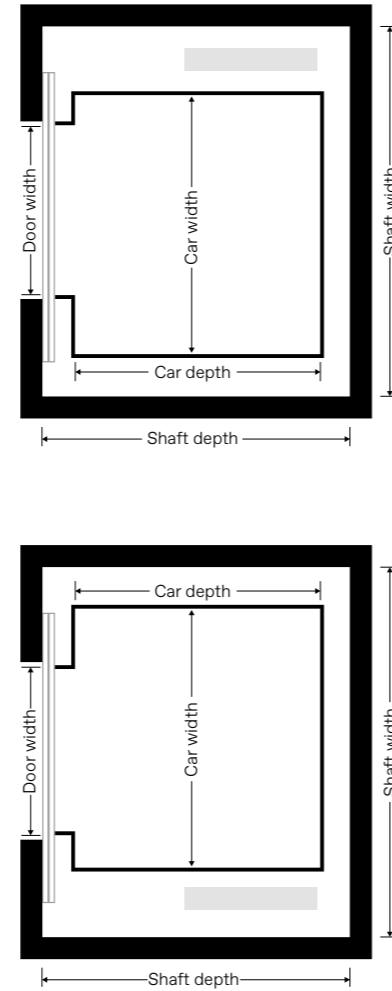

TECHNICAL SPECIFICATIONS (MACHINEROOM-LESS)

Basic parameters

RATED LOAD (KG)	RATED SPEED (M/S)	MAX. TRAVEL HEIGHT (M)	MAX. NUMBER OF FLOORS
630	1.0	50	18
	1.6	75	26
	1.75	90	31
800	1.0	50	18
	1.6	75	26
	1.75	90	31
1000	2	110	32
	1	50	18
	1.6	75	26
1150	1.75	90	31
	2	110	32
	1	50	18

Minimum shaft head height and shaft pit depth

RATED LOAD (KG)	CAR HEIGHT (MM)	RATED SPEED (M/S)	MIN. OVERHEAD HEIGHT (MM)	MIN. PIT DEPTH (MM)
630 - 800	2400	1	4150	1800
		1.6	4300	1900
		1.75	4350	1950
	2200/2300	2	4450	2050
		1	3950/4050	1800
		1.6	4100/4200	1900
1000 - 1150	2400	1.75	4150/4250	1950
		2	4250/4350	2050
		1	4150	1300
	2200/2300	1.6	4300	1450
		1.75	4350	1500
		2	4450	1550
1000 - 1150	2200/2300	1	3950/4050	1300
		1.6	4100/4200	1450
		1.75	4150/4250	1500
1000 - 1150	2200/2300	2	4250/4350	1550

* Standard car height is 2400mm and 2200/2300mm are optional.

Car/Shaft dimensions

RATED LOAD (KG)	CAR SIZE (CW × CD)(MM)	DOOR OPENING	DOOR SIZE (DW × DH)(MM)	MIN. SHAFT SIZE (SW × SD)(MM)
630	1100 × 1400	Centre Opening	800 × 2100	1750 × 1800
	1350 × 1400			1950 × 1800
800	1100 × 1700	Centre Opening	900 × 2100	1750 × 2100
	1600 × 1400			2200 × 1800
1000	1600 × 1500	Centre Opening	900 × 2100	2200 × 1900
	1100 × 2100			1950 × 2500
	1800 × 1400			2400 × 1800
1150	1200 × 2100	Centre Opening	1000 × 2100	2200 × 2500

* For specification over the above scope, please contact the local thyssenkrupp Elevator representative.